



Twist II Clean

Inline Water Filters

The Twist II Clean filters have many unique and patented features and benefits placing them in a class of their own.


- Simple 1/4" turn operation
- Filter element flushes completely clean in less than 20 seconds
- No need to turn off water to clean (eliminates air in system)
- Rugged design installs indoors or outdoors
- Stainless steel filter element lasts for years
- Never buy filter cartridges again!




Patented Reverse Flushing Action

When the top handle is turned, three events take place:


- 1 Flow direction is changed to inside-out
- 2 The filter element is lifted to open the bottom flush port
- 3 An inside-out backwash occurs, and the filter element is cleaned

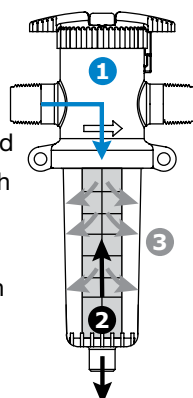


Technical Specifications

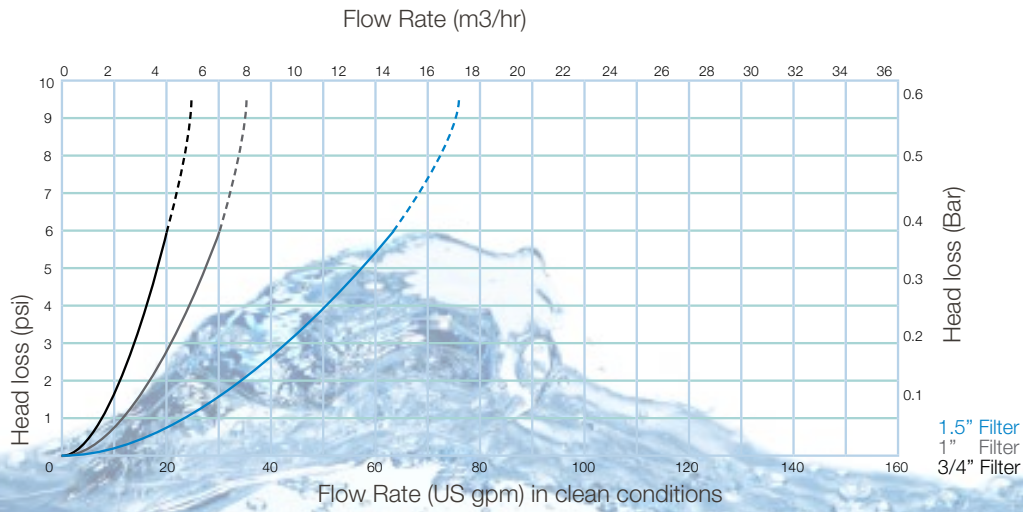

1" & 3/4" Filter dimensions

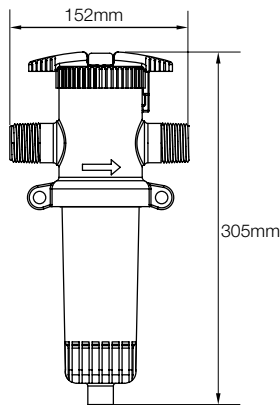

1.5" Filter dimensions

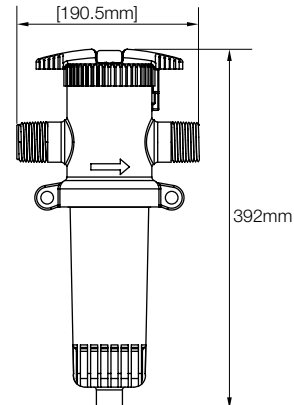

Model	Description	Max Flow rate		Filter screen size		Pression max.		Inlet/Outlet pipe connection	Purge outlet
		m3h		Mesh	Micron	psi	bar		
017004	TIIC 3/4" 105 Micron	5.68		140	105	100	7	3/4"	1/2"
017008B	TIIC 1" 105 Micron BSP	8.86		140	105	100	7	1"	1/2"
017011B	TIIC 1.5" 105 Micron BSP	17.72		140	105	100	7	1.5"	3/4"
015700B	TIIC 2" 105 Micron Flange	34		140	105	100	7	2"	3/4"
012610	Cartridge TIIC 3/4" - 1"			140	105				
012613	Cartridge TIIC 1.5"			140	105				
012612	TIIC 3/4 & 1" Sunshield								
012615	TIIC 1.5" Sunshield								